


Data sheet

KNX USB Interface Stick 332

(Art. # 5254)

Compact USB Interface between PC and KNX bus

Photo of the device

**Application area**

The KNX USB Stick 332 is a data interface between a PC or laptop and the KNX installation bus. It can be used as a programming interface for ETS® Software Version 3 (or higher) and supports KNX long frames. Long telegrams enable a faster download to devices that can receive these telegrams.

The LEDs in the device indicate the operating status and communication errors on the bus. The USB connector is galvanic isolated from the KNX bus.

Notes for developers: In addition to the telegram interface via cEMI, the KNX USB Stick 332 includes a complete KNX Stack with communication objects and BAOS protocol V2. Thus, the stick offers the possibility to extend devices with USB connection to full KNX devices, which can even be programmed by ETS.

For more information about this solution and available SDKs please contact WEINZIERL.

Technical Specification**Electrical safety**

- Protection (acc. EN 60529): IP 20

CE marking according to

- EMC directive 2014 / 30 / EU
- RoHS directive 2011 / 65 / EU
- EN 50491-3: 2009
- EN 50491-5-1: 2010,
EN 50491-5-2: 2010,
EN 50491-5-3: 2010
- EN 61000-6-2: 2005
EN 61000-6-3: 2007 + A1: 2011
- EN 50581: 2012

Environmental requirements

- Ambient temp. operating: - 5 ... + 45 °C
- Ambient temp. non-op.: - 25 ... + 70 °C
- Rel. humidity (non-condensing): 5 % ... 93 %

Mechanical data

- Housing: Transparent plastic (ABS)
- Dimensions: 60 x 19 x 13 mm
- Weight: Approx. 12 g
- In plastic box 94 x 43 x 22 mm

Indicators

- 2 LEDs, multicolor

KNX

- Medium TP
- Interface protocol: HID/cEMI
- Max. APDU length: 55
- Object Server: BAOS V2
- Device model: System B

Power supply


- USB < 10 mA
- KNX < 3 mA

Connectors

- Connector for KNX TP Bus (Pluggable screw terminal)
- USB: Connector male type A
Max. cable length: 5 m

Installation Instructions

- The device shall be used in indoor areas only.
- It can be connected directly to a USB port of a PC or laptop.
- The KNX connector is marked at the enclosure with +/- for bus polarity.

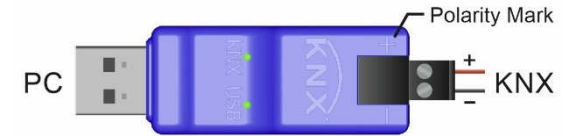

Wiring diagram

**WARNING**

- The device must be mounted and commissioned by an authorized electrician.
- The prevailing safety rules must be heeded.
- The device must not be opened.
- For planning and construction of electric installations, the relevant guidelines, regulations and standards of the respective country are to be considered.

**Weinzierl Engineering GmbH**D-84508 Burgkirchen / Alz
Germany<http://www.weinzierl.de>
info@weinzierl.de