


Data sheet

KNX IP Multi IO 580 (48/I/O)

KNX IP Multi IO with 48 configurable In- and Outputs

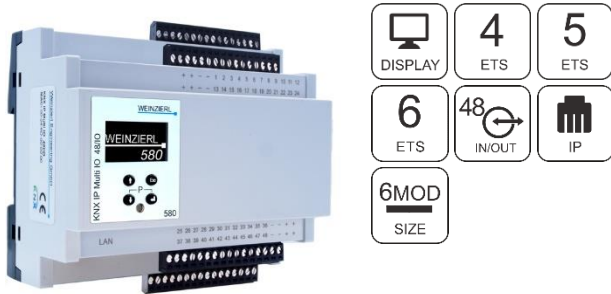

(Art. # 5238)

Application area

The KNX IP Multi IO 580 is a universal binary interface for building control. It provides 48 I/O lines. Each line can be used as binary input as well as binary output. The peripherals can be fed by an external voltage of 24 V_~. Channels which are configured as inputs can be used to control lights or blinds via the KNX network. They also can be used to count impulses, e.g. as interface for energy meters. Channels which are configured as outputs can directly drive signal LEDs, external coupling relays (e.g. 590) or jalousie relays (592).

The device works using the medium KNX IP. It can be configured using the ETS (Version 4.2 or higher) with native parameters and standard group objects. Also the KNX addressing scheme, based on individual device address and group objects, is unchanged. An easy to read OLED display on the front panel enables a manual operation to test the installation.

Technical Specification

Electrical safety

- Protection (acc. EN 60529): IP20

CE marking according to

- EMV Richtlinie 2014 / 30 / EU
- RoHS Richtlinie 2011 / 65 / EU
- EN 63044-3: 2018
- EN 50491-5-1: 2010
- EN 50491-5-2: 2010, EN 50491-5-3: 2010
- EN 61000-6-2: 2019
- EN 61000-6-3: 2007 + A1: 2011
- EN 63000: 2018

Environmental requirements

- Ambient temp. operating: - 5 ... + 45 °C
- Ambient temp. non-op.: - 25 ... + 70 °C
- Rel. humidity (non-condensing): 5 ... 93 %

Mechanical data

- Housing: plastic (PC)
- DIN rail mounted device, width: 6 units (108mm)
- Weight: approx. 260 g

Controls and indicators

- OLED display with 4 buttons
- KNX programming LED (red)

KNX

- Medium IP

Power supply

- I/O lines: 24 V_~, ca. 45 mA with no load

Connectors

- LAN RJ-45 socket
- Pluggable screw connectors (4 poles) for power supply
- Pluggable screw connectors (12 poles) for I/O lines
- Cross-section of connectors: 0.14 ... 1.5 mm²

Output


- Open-Drain, max. 100 mA, incl. flyback diode

Inputs

- Incl. pull-up resistor

Installation Instructions

- The device may be used for permanent interior installations in dry locations, within distribution boards or small casings with DIN rail.

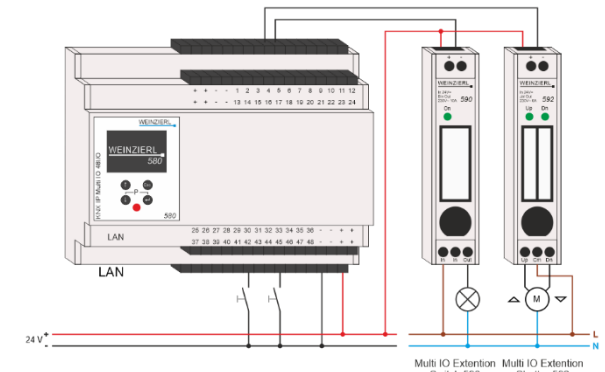**WARNING**

- The device must be mounted and commissioned by an authorized electrician.
- The prevailing safety rules must be heeded.
- The device must not be opened.
- For planning and construction of electric installations, the relevant guidelines, regulations and standards of the respective country are to be considered.

ETS6 Database

www.weinzierl.de/en/products/580/ets6

Manual

www.weinzierl.de/en/products/580/manual

CE Declaration

www.weinzierl.de/en/products/580/ce-declaration

WEINZIERL ENGINEERING GmbH

Achatz 3-4

84508 Burgkirchen an der Alz

GERMANY

Tel.: +49 8677 / 916 36 – 0

E-Mail: info@weinzierl.deWeb: www.weinzierl.de