


MADE  
IN  
GERMANY

WEINZIERL



development 2020

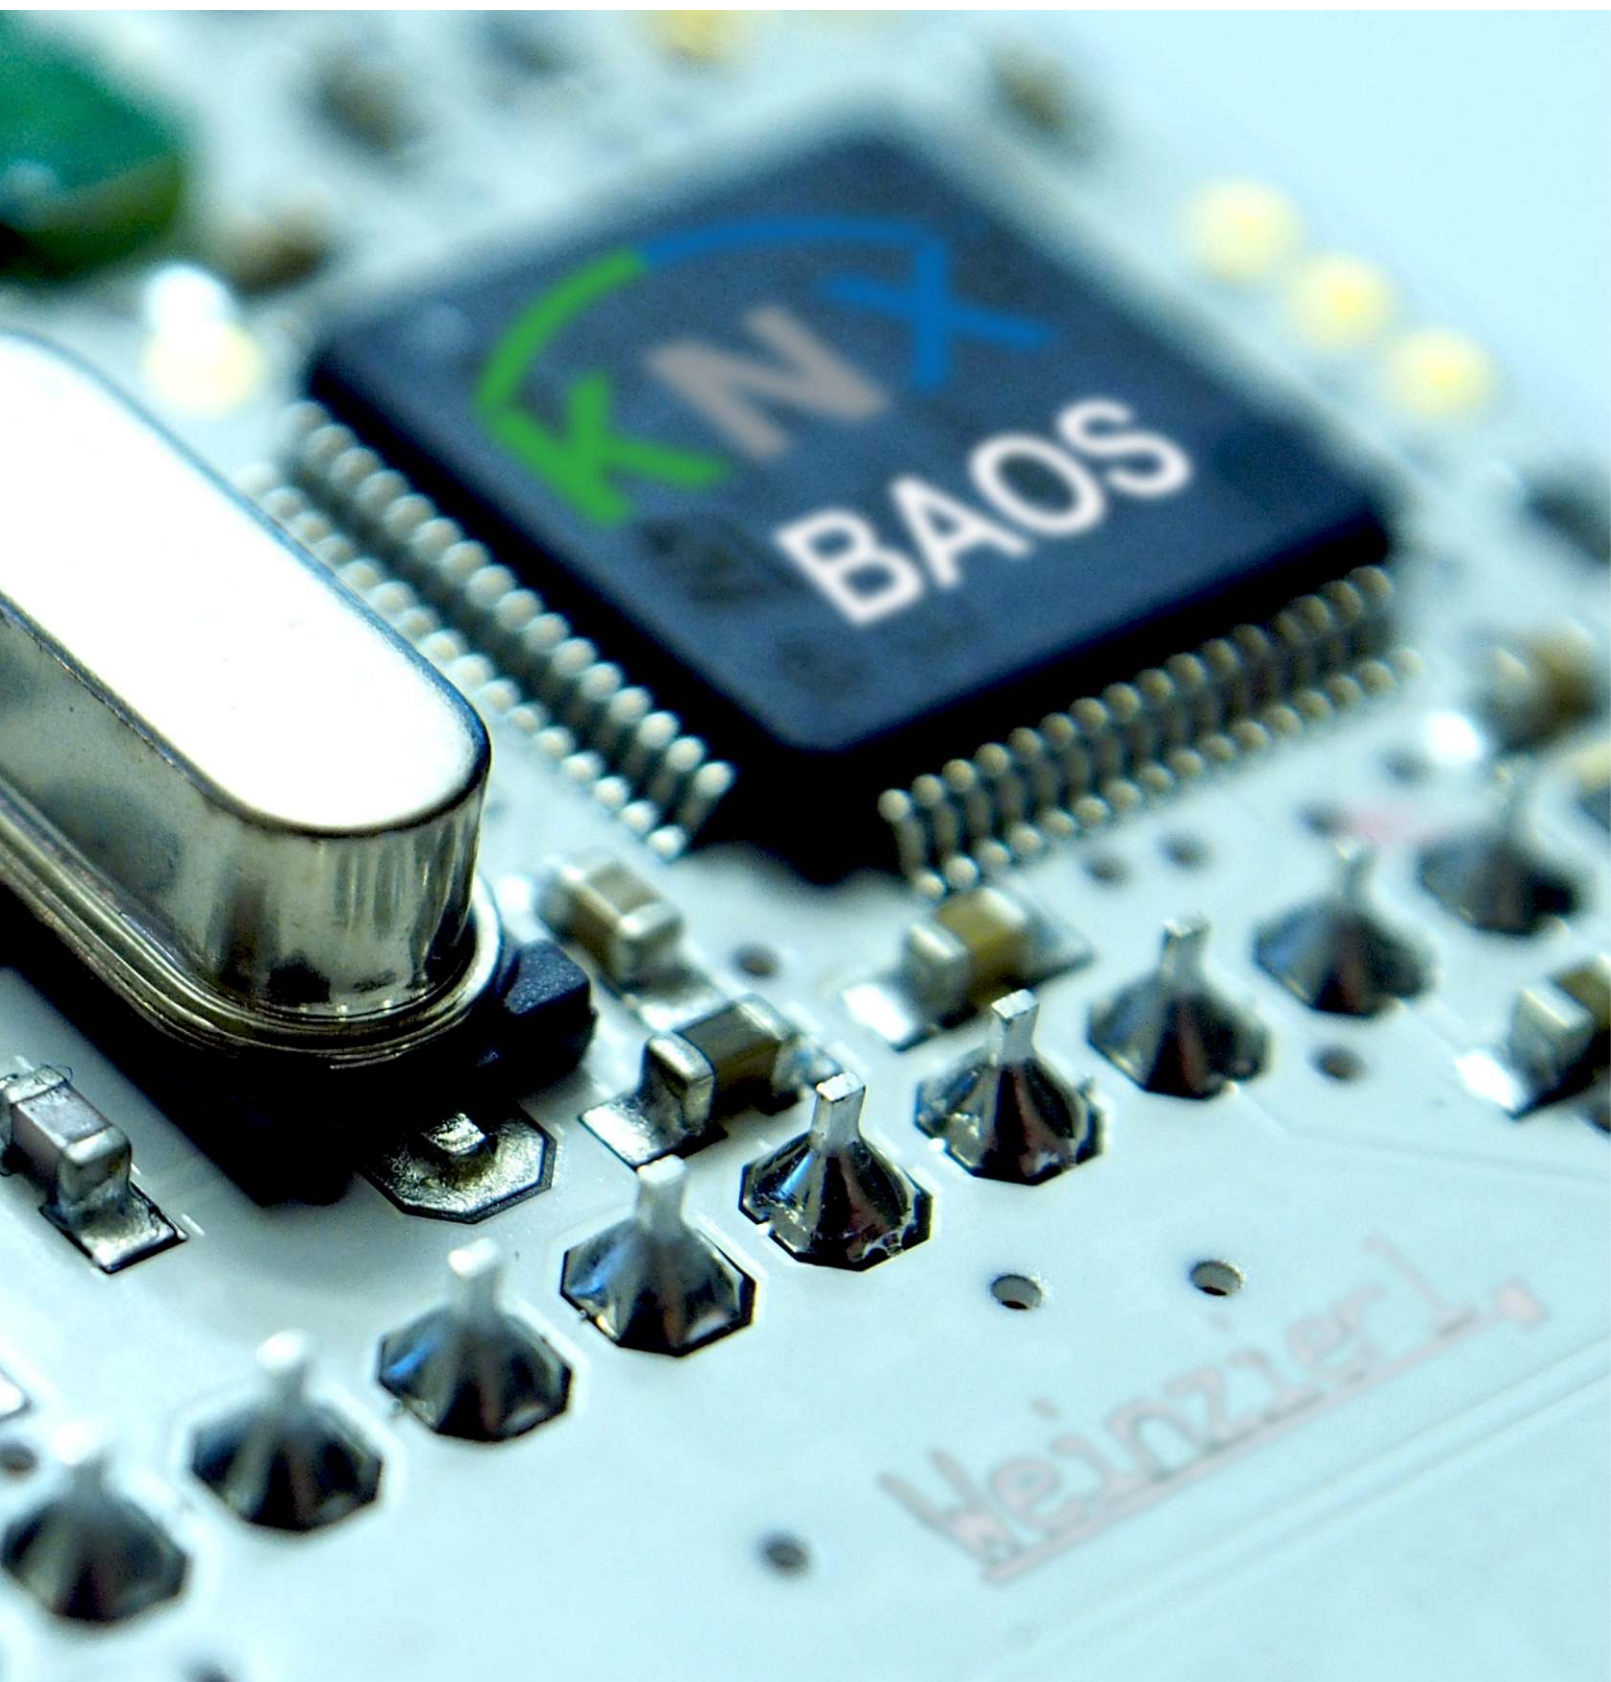

# About us

## We are Weinzierl

Weinzierl Engineering GmbH develops software and hardware components for building electronic systems. Our focus is on building networks based on the KNX standard. With our team of experienced developers and dedicated staff, we comprehensively cover the KNX system with our products and development solutions.

## Competence

Weinzierl has its own system development, both in the field of KNX stacks as well as software tools. This development forms the basis for the rapid implementation of new technologies such as KNX RF (radio) with complete ETS® integration or innovations like KNX IP-only devices.

## Worldwide unique and open

KNX is the world's only open standard for home and building control. The KNX technology with its different media, is used worldwide for a large number of installations. KNX is the only system for building control which complies with international standards like ISO/IEC and ANSI.

## Quality

The quality of our products and services is a main basis for the success of our customers. For more than 10 years our company is certified according to ISO 9001. To ensure the quality of KNX solutions we have established an inhouse test lab accredited by the KNX Association.

## Our technological heart

The heart of our development solutions are our stack implementations for all standardized device models and media for KNX. We offer KNX certified system software for Twisted Pair (TP), Radio Frequency (RF) and Ethernet (IP). Our system software is available as a standalone product.

## Solutions for your Development

Our core development products are components for the integration of KNX connectivity into embedded devices. This includes a wide range of KNX Modules and Stacks, offering cost effective yet scalable solutions for KNX devices. With our broad product range we deliver optimal solutions for all your development needs.

# Focus on KNX

## Your Partner for KNX

The comprehensive specifications of the KNX standard are a great opportunity for manufacturers to create new solutions for home and building automation. Offering professional development services and a KNX accredited test lab, Weinzierl is your partner for cost effective solutions to develop and implement your KNX devices.



## We shape the Future

The KNX standard is continually evolving. To actively support this process we are a member of the KNX System Group (KSG) and take part in special working groups, like the KNX IP Task Force. Thus, we always offer you the latest information and trends.

## Simply secure

The security requirements in building automation are increasing. Weinzierl has recognized this at an early stage and is significantly involved in the development of KNX Secure and secure EnOcean devices and solutions to improve the security of KNX installations even further.

## First choice

The best solution is KNX - the world's only open standard for home and building system technology. KNX was confirmed as the first worldwide standard for building system technology according to EN and ISO/IEC. With our own devices for EnOcean we support another successful standard of building automation, which is particularly suitable for retrofit solutions.

2/3	About us / Focus on KNX
4/5	Developing: How to start / BAOS
6/7	BAOS Serial / BAOS USB
8/9	IoT / BAOS IP
10/11	Stack Overview / Security
12/13	Stack NGS / Next Generation
14/15	Medium Access Packs / kScript
16/17	BAOS SDK / kDrive SDK
18/19	Development Tools / Services



# Developing: How to start




## DEVELOPMENT FIRST STEPS

### Making Decisions about

- Medium
- Configuration Mode
- Development Platform

While the choice of the medium and the configuration mode are typically defined by the application, the decisions regarding hardware and device model can often be difficult - especially if this is your first KNX development project.

These decisions become even more complex as they are strongly related to investments in system software, training and tools. From a long term perspective, these decisions also may influence the complete range of a manufacturer's KNX product range. Therefore it is essential to select a development platform with proven flexibility and scalability for a lasting and effective development cycle.

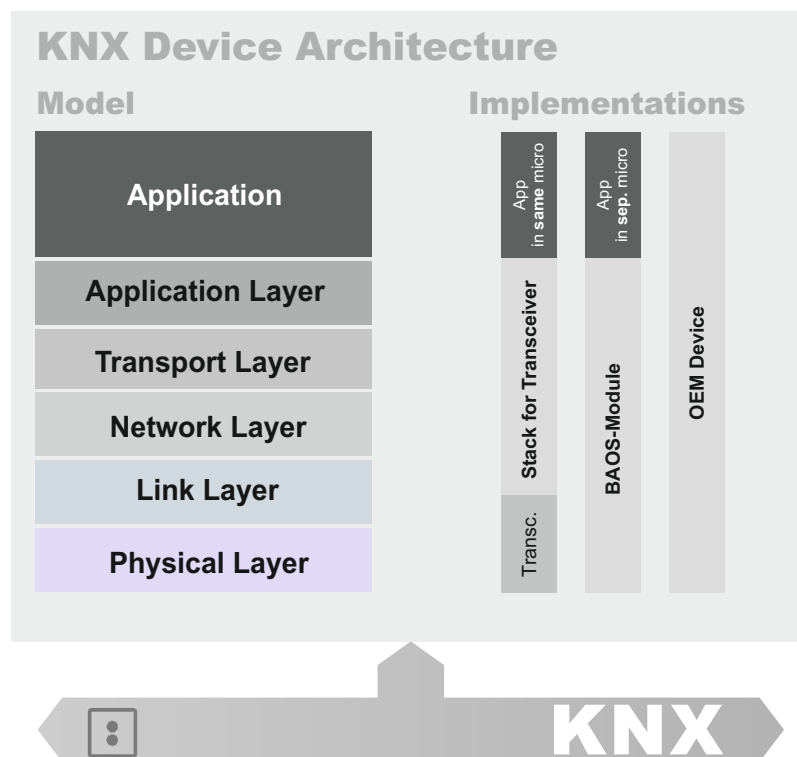

### Jump Start: OEM Devices

With OEM versions of our devices you can quickly offer your own branded KNX solutions. Choose between our comprehensive range of USB Interfaces, Gateways, IP Interfaces, IP Routers, our innovative IP BAOS devices and our new KNX IO series. We manage the complete production process including full customization of the devices and thus you can easily complete your product range.

### Platforms for individual OEM

If you need more individual features for your KNX devices we develop your KNX devices with feature sets tailored to your needs. Based on our platform concept we can create devices with unique selling points for your offering.



# BAOS

## The World of BAOS


BAOS - "Bus Access and Object Server" - is a universal architecture to enable KNX connectivity for a great variety of products. Weinzierl offers a scalable set of modules and powerful devices which rapidly enable the complete integration of applications into the KNX System. BAOS Modules and Devices can be used as interfaces to connect to KNX both on the telegram and on the data-point level (the KNX Application Layer). BAOS Solutions allow an easy integration and implementation of KNX connectivity while releasing the application itself from the complexity of the KNX protocol, including the network management.

## Telegram Interface

BAOS modules and devices provide an interface to the KNX network on telegram level. Regardless whether frames are individual or group addressed or broadcast telegrams. The BAOS implementation allows direct access via cEMI (common external message interface) protocol according to the KNX Standard.

## Object Server

Main use case of the BAOS architecture is communication using the integrated object server. Client applications don't need to handle KNX telegrams but can access data points. This level of abstraction decouples the application from the KNX system and KNX commissioning can be done via ETS® soft-

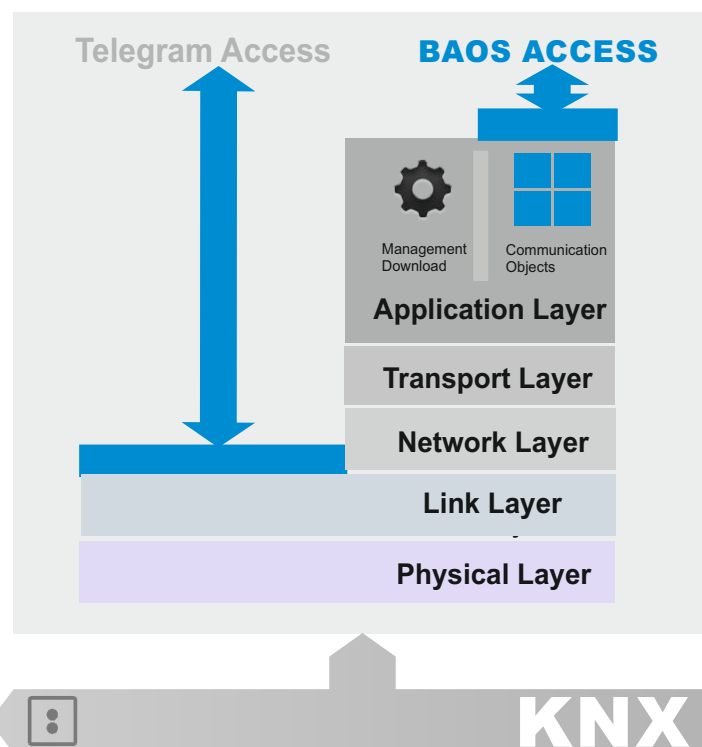

## SDKs and Demo Application

For a fast and easy integration of BAOS solutions into application and devices, Weinzierl provides free demo code and SDKs (software development kits).

## Generic Database

For all KNX BAOS modules and devices, Weinzierl provides a generic ETS entry with free configurable data points and free parameter bytes. This speeds up getting started in KNX development with just a few steps. Individual ETS entries can be created using the KNX MT (Manufacturer Tool - available from KNX Association).

## Different BAOS connectivities


- **KNX BAOS Serial** modules allow full integration of KNX connectivity into any embedded device with UART connection.
- For more complex devices running an OS like Linux the **KNX BAOS USB** connectivity is a perfect option. USB protocol is implemented according to KNX standard.
- **KNX IP BAOS** devices enable connectivity via IP/LAN connection (even via Wi-Fi). KNX IP solution supports multiple connections in parallel. In addition to the KNX BAOS Binary protocol, IP devices support JSON web services.

# BAOS Serial Modules

# SERIAL

## Weinzierl BAOS Serial Modules

A quick and efficient solution to connect your devices with KNX are KNX BAOS modules. The modules include both a KNX transceiver and a micro-controller with a certified KNX stack. Communication with the module is executed via the reliable Serial Protocol FT1.2. It enables sending and receiving of KNX telegrams according to the cEMI (common external message interface) format. However, the main use case is the communication on the datapoint level.

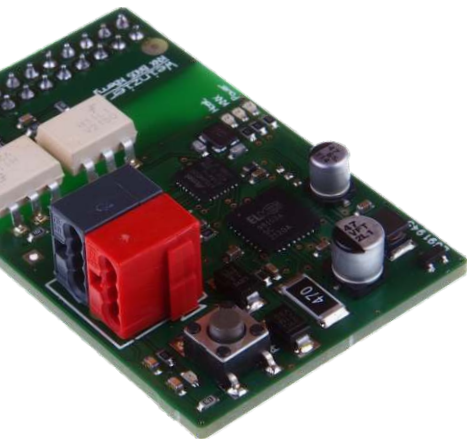


**BAOS Development Kit**  
(Art.-No. 5240)

To start your development project, a BAOS Development Kit is available which contains:

- Development board
- KNX BAOS modules
- Tools and Demo Software
- Manual

## **KNX BAOS 830 TP** (Art.-No. 5171)

The latest generation of KNX BAOS Modules: the KNX BAOS 830 offers a generic data base with 1000 group objects/data points, galvanic isolation and is powered via the bus.



## **KNX BAOS 832 TP** (Art.-No. 5239)

Same feature set as the model 830, the KNX BAOS Module 832 provides power for the application without galvanic isolation.



## **KNX BAOS 838 TP kBerry** (Art.-No. 5208)

The KNX BAOS Module 838 kBerry is an adaptation of our KNX BAOS modules specifically made for the Raspberry Pi. It can be attached directly to the pins of the Raspberry Pi and communicates via a serial port. A free SDK is available for download.



## **KNX BAOS 840 RF** (Art.-No. 5209)

The wireless member within the modules family is the KNX BAOS Module 840 RF: it is the wireless variant (KNX RF) of the KNX BAOS 830 module and implements KNX RF with full ETS5 support.





# USB

## Future proof

The KNX USB Interfaces 312 / 332 as well as the KNX USB Module 322 implement a complete KNX Stack with communication objects and BAOS protocol V2. Thus, both offer the possibility to extend devices with USB connection to full KNX devices, which can even be programmed by ETS.

## Fully compliant

So a USB link is suitable to extend state of the art hardware with KNX connectivity. The KNX USB BAOS solution is fully compliant with the KNX USB specification of the KNX Standard. It is based on HID reports and uses standard cEMI frames for the telegram interface. Via the normal local device management the BAOS protocol can be discovered and activated.



**KNX USB Interface 322 Module (Art.-No. 5257)**

Functionality like Art.-No. 5254  
PCB without enclosures  
Size: 39.2x14.5 mm  
Solder connectors provided for KNX and USB



**KNX USB Interface 312 (Art.-No. 5229)**

KNX USB Interface  
Support of KNX Long Frames  
BAOS Binary Protocol  
Power supply: USB  
Connectors: KNX, USB type B  
Case: DIN rail mounted, 18 mm width



**KNX USB Interface 332 Stick (Art.-No. 5254)**

KNX USB Interface  
Support of KNX Long Frames  
BAOS Binary Protocol  
Power supply: USB  
Connectors: USB Type A, KNX (plugable screw connector)  
Case: transparent USB stick

## Truely universal

The Universal Serial Bus (USB) replaces more and more standard UART communication. The main benefits are a standardized power supply (5 V) via the connector and a well-defined discovery via the USB enumeration process. In addition, the number of USB ports can easily be extended using a USB hub. Finally today a USB host implementation is available in many operating systems like Linux or all versions of Windows.

## Integrated KNX Stack

Switching to the BAOS protocol enables the full KNX Stack integrated in the KNX USB BAOS device or module. The communication switches from data link layer (telegrams) to application layer (data points).

## Simple Configuration via ETS

In BAOS mode the device behaves like a normal end device in the KNX system. The individual address can be assigned by ETS as usual. The KNX programming mode can be operated via the host protocol. The application download programs the communication tables as well as user parameters. The generic database available from Weinzierl can be used for first steps. Of course also for the USB option it is possible to implement individual ETS entries with application specific data points and parameters.

## Case by case

Integrated as module 322 or stick 332 in a device the KNX USB BAOS solution achieves a full value KNX device with possible individual ETS entry and KNX certification. Placing the stick as external device or using the rail mounted version 312 allows handling KNX connectivity as an option which can be added case by case.

# Internet of Things



## IoT - since 2006

More than 10 years ago it already became obvious that IP connectivity will be of great importance in home and building control. With the release of its first KNX IP BAOS device 770 Weinzierl introduced the first implementation towards Internet of Things (IoT) already in 2006. Starting with small expectations and low volume back then, the KNX IP BAOS architecture has established to become the most successful solution nowadays to connect non-KNX devices to KNX networks via IP.

## Binary style and web services

KNX IP BAOS devices map KNX data to an IT-friendly API (Application Programming Interface). The BAOS protocol is implemented in a binary style as well as in a web service format based on JSON syntax. The KNX IP BAOS 777 even supports a RESTful JSON API. Thus, IP BAOS devices greatly reduce the effort to connect any IP featured applications. Even control or visualization tools can smoothly be integrated into KNX.

## RESTful Services

The KNX IP BAOS 777 in addition supports a RESTful service API. Via RESTful services the device provides the complete semantic information required to control the installation. It can be used to find all rooms and extract the installed functions. Each function is a set of data points with a well-defined relation like control and status feedback. And of course the RESTful Services provide access to the KNX data points which hold the runtime data. A web socket notification system (server push) is implemented for fast indications. Using the RESTful services, it is possible to integrate a KNX installation in other control systems fully automated without dealing with KNX specific data and without the use of an additional editor.

## BAOS configuration via DCA

For BAOS Modules and Devices a generic ETS entry is available providing a list of all available data points. It allows to select a data point type and to fill-in a name for each data point. In addition, a so-called DCA (Device Control App) is available now. It enables the import and export of a BAOS configuration via a csv-file. A DCA is a kind of plug-in in ETS5. It is shown as an additional tab for each device.



**KNX IP BAOS 774**  
(Art.-Nr. 5263)

*As KNX IP BAOS 773  
Up to 1000 data points*







## KNX IP BAOS 773 (Art.-Nr. 5262)

KNX IP Interface with Object Server  
KNX IP Tunneling: 5 connections  
BAOS IP: 10 connections  
Up to 250 data points  
Power supply: KNX (29 V DC, 15 mA)  
Connectors: KNX, LAN RJ-45 socket  
Case: DIN Rail mounted  
1 module width (18 mm)



## Residential Gateway

While all KNX BAOS solutions provide an object server with an interface on data point level the KNX IP BAOS 777 in addition provides a description of the control network of a building. Via RESTful JSON API it retrieves semantic information about the KNX installation.



## Simple and powerful visualization

Using ETS, the installer defines the rooms and which functions are available to the client. The KNX IP BAOS 777 encodes the rooms of a building as well as the available functions as a set of meta-data. While a room is seen as a collection of functions, a function is a collection of data points representing a specific KNX interworking function.



## E-mail services

The integrated e-mail functionality allows the easy setup of push notifications for individually selected functions and data points.

## Smart Integration

The semantic information stored in the KNX IP BAOS 777 is used by the web visualization of the device. All information about rooms and function origin from parameter settings in ETS. The web visualization internally uses the same RESTful API which is also accessible from remote applications.



## Timers

The timers - synchronized via Network Time Protocol (NTP) and visible in the web visualization - are just one possible front end of the timer functions provided by the BAOS API. Timers can also be created and started by any client, e.g. mobile apps. As timer functions are running on the BAOS device no further client activities are necessary.




## Logging

The KNX IP BAOS 777 has an integrated data logger which can be enabled for any configured data point.

## KNX IP BAOS 777 (Art.-Nr. 5193)

KNX IP Interface with Object Server  
Web Server with Visualization  
RESTful web services  
KNX IP Tunneling: 8 connections  
BAOS IP: 10 connections  
Up to 2000 data points  
Power supply: External supply  
12..30 V DC or PoE  
Power consumption: < 2 W  
Connectors: KNX, LAN RJ-45 socket  
Case: DIN Rail mounted  
2 module width (36 mm)

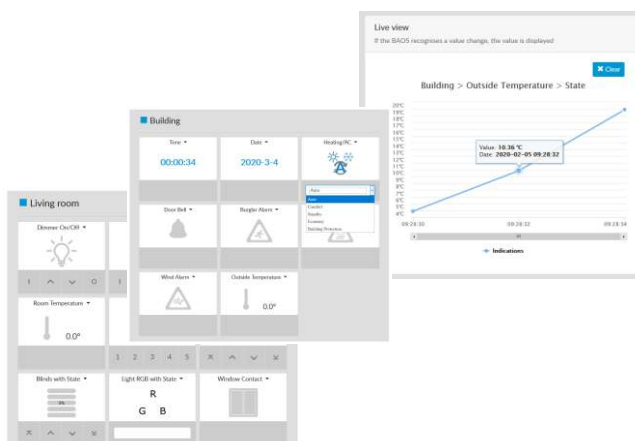

KNX IP BAOS 777

Username

Password

Sign In

Need help?

# KNX Stack Overview

# STACK

## KNX Communication

Each device which communicates via a KNX network needs an implementation of the KNX protocol. The KNX protocol is specified according to the OSI reference model (Open Systems Interconnection) as a set of layers.

The KNX system is a decentralized network. The runtime communication is mainly based on group telegrams in multicast. To participate in the KNX runtime communication each device must be configured, e.g. group addresses must be assigned.

Typically this is done via the official ETS® program available from the KNX Association. The configuration can be loaded into the distributed devices via the KNX network during the device download. The management procedures are quite complex and are also part of the KNX Standard.


In contrast to the runtime communication the network management is asymmetric. A KNX device which can be loaded via the network is called a KNX management server. It offers services like memory write to the programming tool which is called a KNX management client.

## KNX Stack for End Devices

Typically, the term “KNX Stack” is used for the system software of a KNX device. A KNX Stack is the firmware which can be used to develop KNX devices like sensors or actuators. Our KNX Stacks are globally used by many well-known manufacturers for a great variety of KNX devices which are produced in high quantities today. A KNX device is always based on a device model. A device model specifies both the management procedure (how the device is configured via the bus) and identifies the resources available in the device (e.g. the maximum size of the connection table).

## KNX Stack for Tool Programming

A program running on a PC typically is not managed by the ETS Software. Therefore, no KNX Device Stack is required. For PC based solutions we provide access to KNX telegrams as well as to KNX services within the framework of our Software Development Kit kDrive explained later in this brochure.

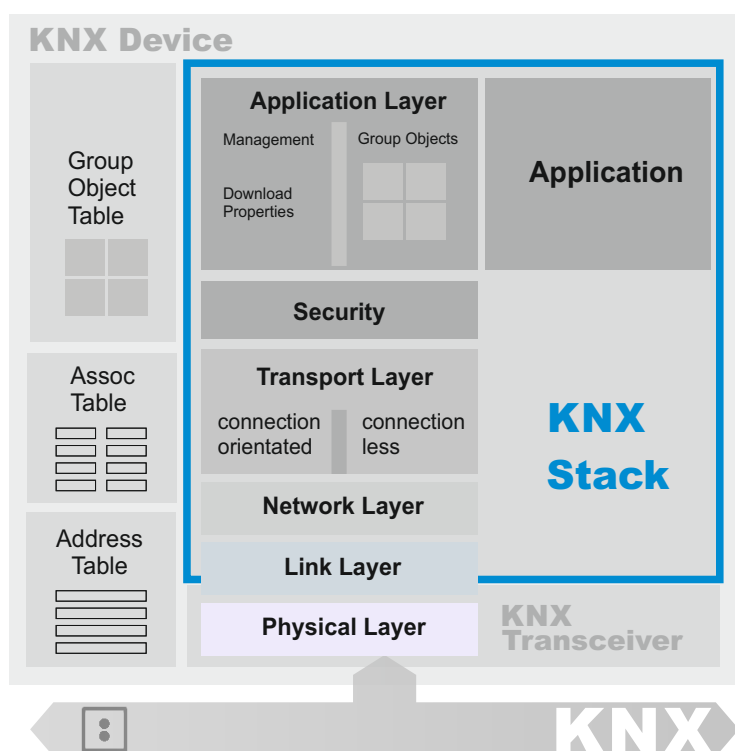



# SECURE

## KNX Stack NGS: System B

Without a doubt: System B is the most powerful device model in the KNX standard and a truly scalable solution. System B is very flexible and can be used on different media. In 2013 the device model System B was adapted to the KNX IP medium as well as to KNX RF in the KNX Standard – System B supports the following media:

- KNX TP (Twisted Pair)
- KNX RF (Radio Frequency)
- KNX IP (KNXnet/IP, Ethernet)

## KNX Security

Since ETS5.5 KNX Installations can be secured on telegram level. With KNX Data Security management telegrams as well as run time communication are secured by a complex set of keys and counters. The encryption and decryption are based on AES-128 algorithm.

## Bootloader

For KNX Security a requirement, for many other devices a useful option: A bootloader is needed whenever the complete firmware of a device must be updated in the field. The Weinzierl KNX bootloader is fully based on KNX. It can be used on any KNX medium as well as via a USB connection. It uses KNX compliant procedures and can be used even with existing KNX tools.



The KNX Stack NGS is available with the option KNX Data Security. It requires some additional hardware resources and encapsulates all security aspects independent from the application:


- Security Algorithms and Resources
- AES128 Encryption/Decryption (SW or HW)
- Security data storage
- Extended memory services
- Extended property services
- Group object diagnostics
- Bootloader

Full KNX Stack or data link layer only: Our KNX USB implementations provide a universal solution for KNX connectivity on Linux.

## KNX on Linux

Time critical bus access is a challenge on operating systems like Linux. As for KNX TP as well as for KNX RF always external hardware is required also the KNX Stack can be implemented external. Our KNX BAOS range together with our free BAOS SDK for Linux offers universal solutions for KNX connectivity via Serial, USB or IP interface.

Nevertheless, it is possible to integrate the KNX Stack NGS into a Linux environment with an external module just for link layer bus access. Please contact our support team to discuss your requirements.

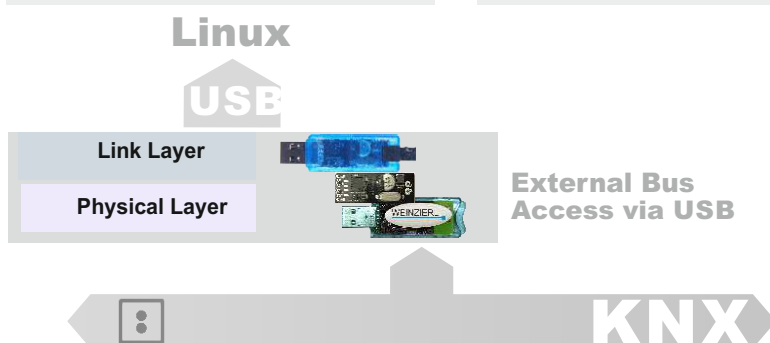

# KNX Stack NGS



## COMPACT and PLUS

As the most flexible device model for KNX, System B is suitable both for simple devices as well as for complex devices that impose significant demands in terms of KNX resources. For this reason our KNX Stack NGS is available in the following editions:

- KNX Stack NGS **COMPACT**
- KNX Stack NGS **PLUS**.

Both editions – COMPACT and PLUS – share the same code basis. This simplifies the change between both versions. Virtual address spaces are used that are resolved at the driver level and mapped to the corresponding physical storage areas. So applications can easily be ported to different platforms.

The firmware includes more than just the communication stack: it provides a complete implementation of the standardized device model System B. The result is unrestricted compatibility with the ETS software. The source code is of modular structure, fully documented and can be included in the KNX Stack NGS package (depending on the license model).


Included in our KNX Stack NGS solution is a developer workshop to help you getting started. We will advise you on system architecture and give you full support for your development work.

## COMPACT FEATURES

- System software for KNX devices
- Medium: TP, RF, IP
- Configuration modes: System mode (ETS)
- Device model: System B
- Up to 255 group objects
- Up to 64 kB loadable memory
- Available for different microcontrollers
- Bus access: KNX UART Transceiver
- Source code in 'C' programming language
- Modular development boards
- Software tools
- ETS support
- KNX certified
- Long frames support allows faster download

## COMPACT ADVANTAGES


The COMPACT edition of the KNX Stack NGS comes with a small footprint but enables a complexity which is suitable for the majority of today's KNX devices. The new Weinzierl System B implementation is very scalable and allows a migration to the even more powerful PLUS edition – making the COMPACT edition future proof.

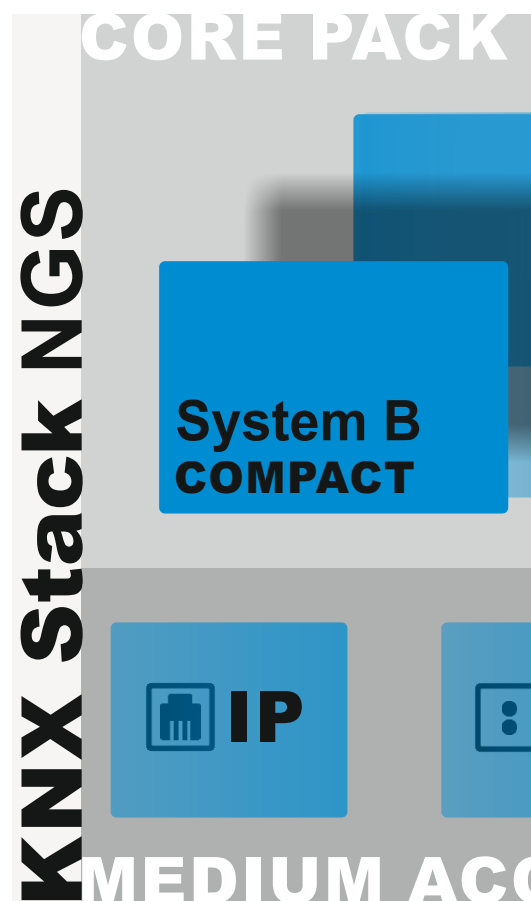

### Supported Microcontroller

As our new KNX Stack NGS implementations are not dependent on special controller architectures the KNX Stack NGS can run on any existing micro controller family as long as a minimum of features is available. To be able to provide a “ready to develop” solution, we offer our software already optimized and certified for different controller families - please contact us.



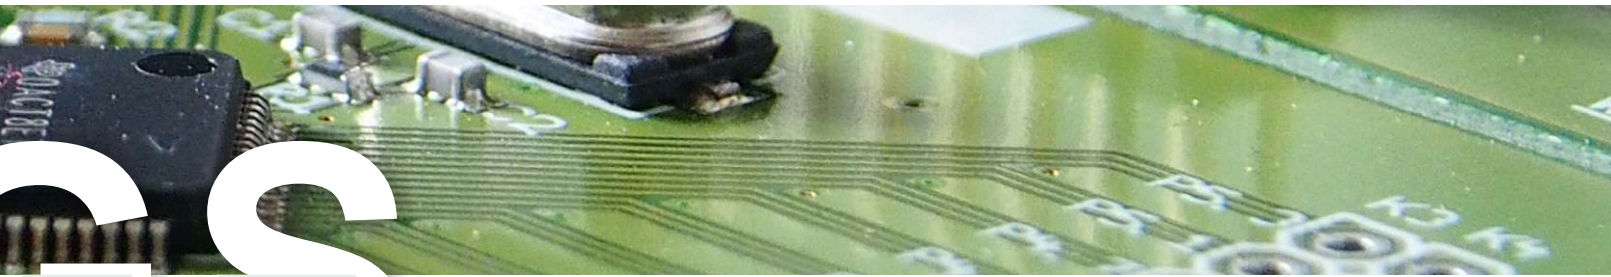

# NGS

## PLUS

### FEATURES

- System software for KNX devices
- Medium: TP, RF, IP
- Configuration modes: System mode (ETS)
- Device model: System B
- Up to thousands of group objects
- Up to 1 MB loadable memory
- Available for different microcontrollers
- Bus access: KNX UART Transceiver
- Source code in 'C' programming language
- Modular development boards
- Software tools
- ETS support
- KNX certified
- Advanced table handling
- Long frames support allows faster download

### Complex Performance

The PLUS edition of the KNX Stack NGS specifically targets complex devices with a 32-bit architecture. It is optimized to ensure high performance for all application sizes. For complex devices it is not only required to support bigger tables. Regardless of the number of group objects, in any case they have to be processed "in-time". While the COMPACT edition is based on code-saving search algorithms, the PLUS editions use additional lookup tables that allow quick access via indices. The processing of the communication objects has also been accelerated and a linear search through all objects is avoided with the use of additional buffers. This increases the demand on memory - however, a huge reduction of CPU clock speed is possible. Furthermore, long frames enable faster downloads.

## PLUS

### ADVANTAGES

The most obvious advantage of the PLUS edition is the number of available group objects. While the COMPACT version supports up to 255 objects, the PLUS version allows thousands of group objects. To achieve this, the formats of the communication tables (group address, association and group object tables) use the extended format for System B. The PLUS version also offers a significantly increased address space. The configuration data like parameters and tables can be loaded into a range of up to 1 MB via the bus. The extended address range can also be used to load application code via the bus – possible within an ETS download.

**KNX  
System B  
32 BIT**

**System B  
PLUS**

**TP**


**RF**

**ACCESS PACK**

#### Development Hardware

Another advantage of Weinzierl's new KNX Stack implementation is in the uniform concept and design of the provided evaluation hardware. The evaluation boards for KNX RF, for KNX TP and KNX IP system software are very similar regarding their schematics and therefore can be used without significant changes by the same application.

# Medium Access Packs for KNX Stack NGS

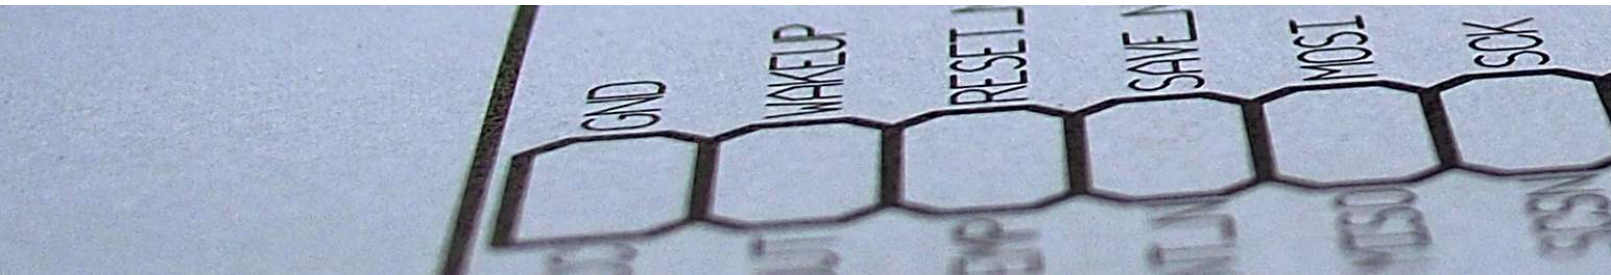

## Medium Access Packages

The Weinzierl KNX Stack NGS is not only scalable but also modular. Both the COMPACT as well as the PLUS edition of the Core Pack can be used for each KNX medium. Medium Access Packages which contain all medium related firmware are available for

- KNX TP (Twisted Pair)
- KNX RF (Radio Frequency)
- KNX IP (KNXnet/IP, Ethernet)

## KNX TP

Twisted Pair is still the most used medium in KNX. Devices connected to the TP can be powered over the bus. Our Medium Access Package for KNX TP contains all TP related firmware and drivers for KNX UART transceivers and devboards.

### KNX TP

#### FEATURES

- High reliability
- Adequate bandwidth
- Power supply for devices
- Low cost

For new designs we recommend the latest generation transceivers such as:

- Elmos E981.03
- Elmos E981.23
- Siemens TP-UART
- Siemens TP-UART-2
- ON Semi NCN5120
- ON Semi NCN5121
- ON Semi NCN5130

They combine a power supply with quite high output current and a small footprint on the PCB.

## KNX RF

Radio Frequency (RF) is the wireless alternative in the KNX standard. In locations that are not suited for cabling KNX RF is used for wireless data transmission. KNX RF was, until ETS5, only supported by Easy Mode. Starting with the ETS5, KNX wireless devices can be configured in the same professional way as standard TP products.

### KNX RF

#### FEATURES

- Medium access over standard ISM Transceiver
- Evaluation board
- Reference Designs
- RF Modules
- Support of System Mode (ETS)

The Medium Access Package for KNX RF contains all RF related firmware parts for the KNX Stack NGS. For KNX RF no dedicated KNX hardware is required. There are different micro-controllers and RF transceivers available which are suitable to implement the KNX RF protocol. The KNX RF standard differentiates between (true) bidirectional and semidirectional devices which are bidirectional for configuration and unidirectional in runtime to save energy.

As RF devices are typically less complex than most TP devices the COMPACT edition of the System B Stack is perfectly suited to implement KNX RF devices for System Mode. For more demanding applications, the PLUS version also supports KNX RF.

## KNX IP


The Internet Protocol (IP) is integrated in KNX as a stand-alone medium and is on the same level as TP or RF. KNX IP devices enable the use of powerful KNX features – like configuration modes and interworking – also on IP.

### KNX IP

#### FEATURES


- High bandwidth
- Usage of existing infrastructure
- Evaluation board

KNX IP opens the door to top level communication within a building (e.g. telecommunication, multimedia, etc.) and allows an entirely new class of KNX devices. Transmission of KNX messages via Ethernet is defined as part of the KNXnet/IP protocol based on UDP. The Medium Access Package for KNX IP contains the stack extensions required for IP communication including a UDP/IP stack. Additional hardware with an Ethernet connection is part of the

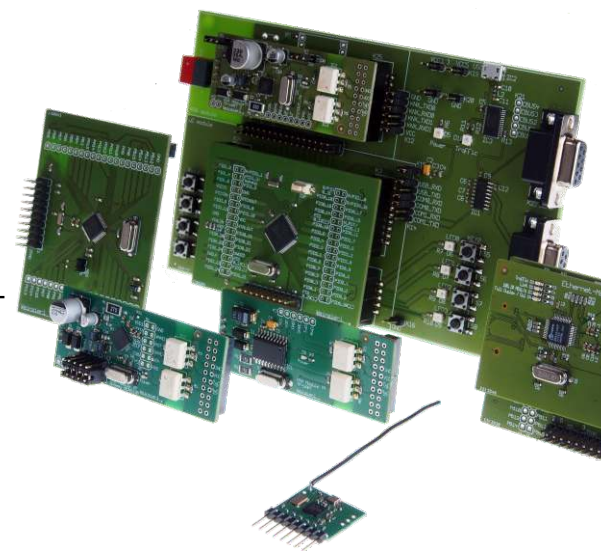



# kScript for KNX Stack NGS

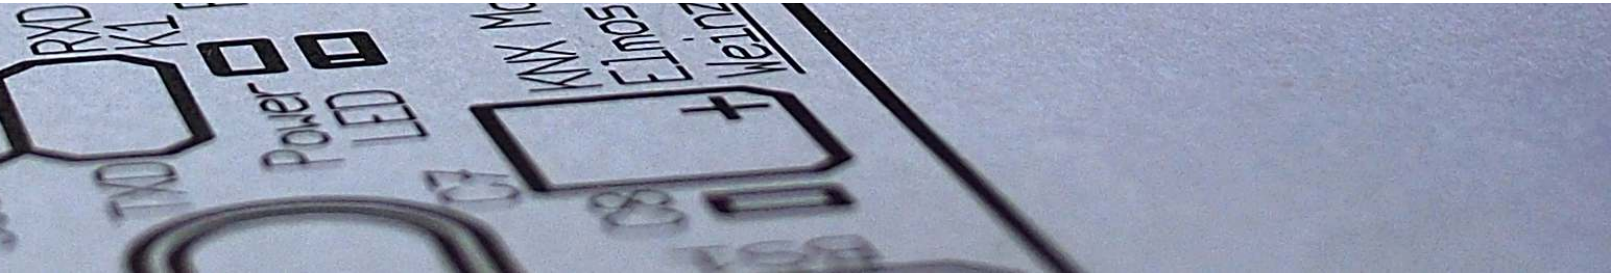

## ETS Product Entry made quick

One major task in application development is the representation of the device in the ETS. Each application is represented in ETS as a set of group objects, parameters and dependencies. The outline of the application can be created with the KNX Manufacturer Tool (KNX MT). This task is quite complex and time consuming. In parallel the application code which runs in the device must be fully in line with the application defined in the ETS. Even a single mistake ends in an unpredictable behavior of a device.

## Just write it down

kScript solves these problems by using a script based development system. The basic idea is to define the outline of the device only once and create the application framework for the device in parallel to the application for the ETS. As both tasks use the same input the output is always in-line - both the static and the dynamic parts including all dependencies and translations. For a programmer the most effective and universal way to describe relations is text. Human readable text is still the basis of all modern programming languages. To avoid the invention of a new syntax for KNX application a well-tried scripting language has been chosen: Python. It is a popular script language in the fields of automation and testing.



## Faster and more efficient

The usage of a programming language enables all options of programming. So scripts can use loops which are a typical requirement for multi-channel devices. Also sub functions can be used and text can be created automatically, like 'Channel 1' and 'Channel 2'. The application script is handled as an integrated file of the application. It can be edited in the IDE (Integrated Development Environment) of the project. The execution of the script is just a pre-build command. As output the script library creates the Xml-File as input to MT. In addition it creates the binary data as input for the KNX Stack. This is on the one hand a set of c-files which hold any data as arrays of bytes and on the other hand a set of header files which allow an easy access to configuration data. The configuration data can be used directly by the Weinzierl KNX Stack NGS. Also the application code can use the output data to access group objects and parameter settings.

## Instant Changes

One essential advantage of the integrated solution becomes visible if a change of the application is requested. Any modification can easily be done in the script. After a run a new ETS entry is generated and new application data for the stack that is automatically in-line.

## BENEFITS kScript

- Script as unique base for application description
- Fast editing in standard text editor
- Usage of loops, conditions etc.
- Usage of functions
- Automated generation of ETS entry (static and dynamic part)
- Automated generation of application data
- Fully compatible with ETS and KNX MT

# kScript

### Main elements

The main elements of the script are:

```
# Create the ETS XML application framework
application_program()
```


```
# Add a parameter
type_restriction('TP_ENABLE', 8, [('YES', 1), ('NO', 0)])
parameter('CHANNEL_1_VALUE_1', 'TP_ENABLE', 'SUB_MCB_4')
```

```
# Add a channel and a parameter block
channel('DYNAMIC', 'CHANNEL_0', number=0)
par_block('CHANNEL_0', 'CHANNEL_0_BLOCK')
```

```
# Add a group object
go_type('GT_INFO', '1.001')
go('CHANNEL_0_BLOCK', 'GO_CH_0_1', number=1, go_type_key='GT_INFO')
```

```
# Defining dependencies
# Add go when value of CHANNEL_1_VALUE_1 is "YES"
go('CHANNEL_0_BLOCK.CHANNEL_1_VALUE_1.(YES)', 'GO_CH_0_2', number=2)
Build the output
```

# BAOS SDK

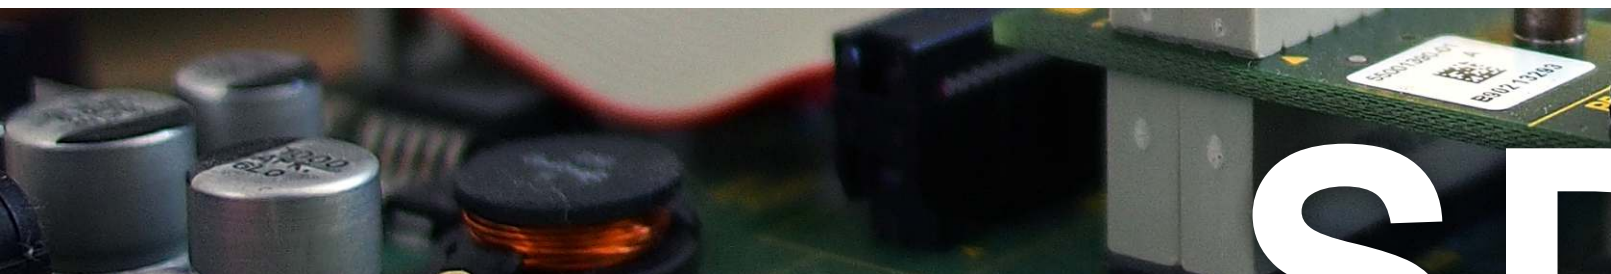

## BAOS Protocols

KNX IP BAOS devices support two separate BAOS protocols: a binary protocol and a RESTful web services protocol. While the BAOS Binary protocol is recommended for controller applications, the BAOS web services are intended for web applications. For both styles of the BAOS protocol a free SDK is available. The free variant of the Net'n Node bus monitor and analyzer supports the BAOS binary protocol as a client tool for development and test.

## SDK for BAOS Binary Services

The Software Development Kit (SDK) for BAOS Binary Services is a C++ implementation of the KNX BAOS Binary Protocol. It can be used for a rapid development of native applications for KNX control which are using the KNX BAOS IP Interfaces. The main use case for this SDK is the integration of the BAOS protocol into controller software.

## SDK for BAOS Web Services

The SDK for BAOS Web Services is a JavaScript implementation of the KNX BAOS Web Services Protocol. It can be used for a rapid development of web applications for KNX control which are using the KNX IP BAOS Interfaces. The main use case for this SDK is the development of visualization apps running in a web browser. Both BAOS SDKs support the KNX IP BAOS 773, the KNX IP BAOS 774 and the KNX IP BAOS 777.

## BAOS for mobile Applications

KNX IP BAOS devices not only allow access to the KNX network. Via the BAOS architecture these devices can also provide semantic information about the installation, including rooms, installed functions and data points. The source of all this information is the configuration done in ETS. An ETS product entry with building structure allows the configuration of a complete visualization without the need of an additional editor.

## BAOS configuration with DCA


For all KNX BAOS Modules and Devices a generic ETS product database is available. Each database provides a list of all available data points. It allows to select a data point type and to fill in a name for each data point. In addition, each module and device supports the configuration with a DCA (Device Configuration App), which makes it possible to export the configured data points into a CSV file and to import already exported configurations. The DCA is displayed as a separate tab in the project window when the corresponding device is selected.

### GET request sample

```
GET request to http://192.168.1.2/rest/structured/views/rooms
Response with status 200 and body:
{
  "groups": [
    {
      "function_count": 8,
      "id": 1,
      "name": "Building",
      "url": "http://192.168.1.2/rest/structured/views/rooms/1",
      "view": "rooms"
    },
    {
      "function_count": 15,
      "id": 2,
      "name": "Living room",
      "url": "http://192.168.1.2/rest/structured/views/rooms/2",
      "view": "rooms"
    }
  ]
}
```


## Responsive Apps

The Object Server stores the most recent values of the installation, even if no client is connected. This means that when a client reconnects all states are available with short latency and without value reads via the KNX bus. For mobile devices, which are not typically permanently connected to KNX, this feature is essential for responsive operation and control.

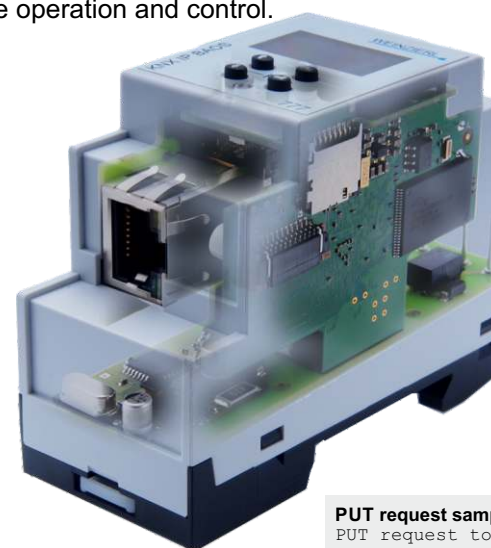

```
PUT request sample
PUT request to
Body of request
{
  "command":
  "datapoint"
  {
    "id"
    "v"
  }
}
}
Response with
```



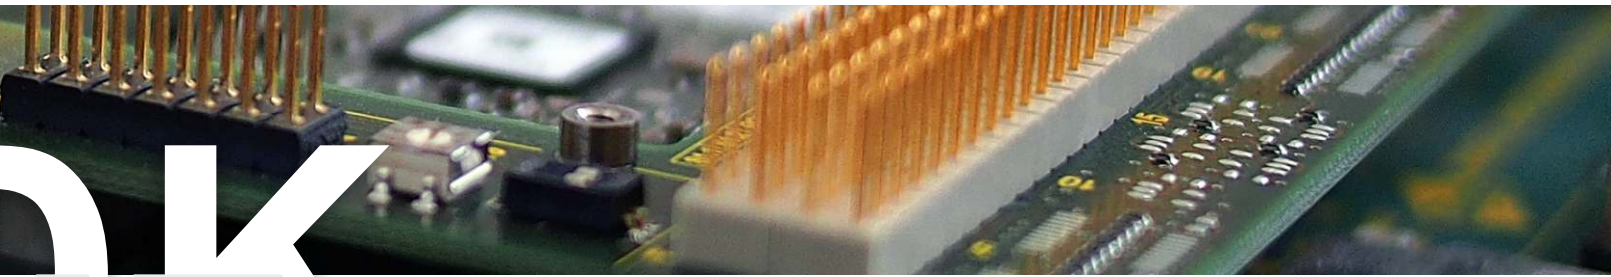

# DK


## SDK kDrive

kDrive by Weinzierl Engineering is a powerful software development kit (SDK) for KNX communication via KNX standard interfaces on the telegram level. It is implemented as a cross-platform software component library with a high grade of flexibility. kDrive defines a complete ecosystem for the rapid development of KNX applications on platforms with POSIX (like) operating systems, such as Linux and Windows. Application programming interfaces (APIs) are available in C++, C and .NET.

## Ready for Security

With increasing demand on the markets for KNX devices supporting KNX Secure, kDrive is ready for KNX Data Security and KNX IP Security.

# kDrive

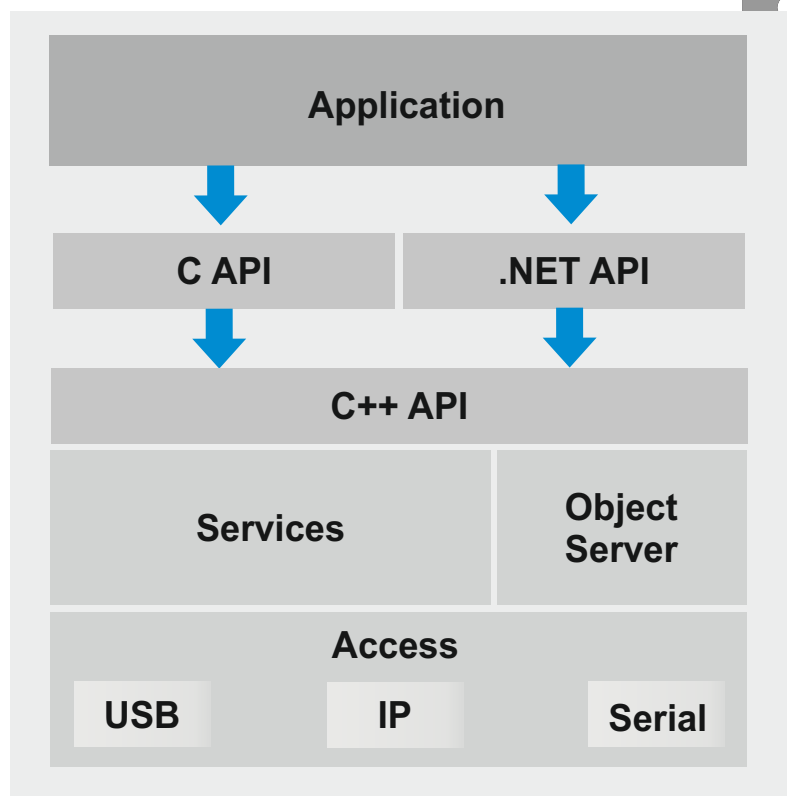

```

ple
http://192.168.1.2/rest/datapoints/values
t:
3,
s_values": [
d": 103,
value": {
  "B": 0,
  "G": 125,
  "R": 78
}
status 204
  
```

## Application area

The purpose of kDrive is to enable the development of KNX software on different operating systems. It can be the basis for visualization tools as well as for individual management clients. A common use case is the implementation of test tools for production.

## All KNX Media

The kDrive library can be used for all media in KNX via standard serial, USB and IP interfaces. kDriveExpress is the binary distribution of the kDrive Library. It is available as free and as commercial license. The following components are currently available in the framework of kDriveExpress:

- Telegram access
- Services


# Development Tools

## Development Tools

Quality of development depends highly on the tools being used during development. It is a great benefit for the customer to work with powerful tools from one source. Due to the common look and the uniform user interface of the tools the developer saves time and resources.

## TraceMon: Debug Support

One big advantage of our unified software model is the overall debugging concept. In parallel to any available hardware debugger via JTAG interface the KNX system software offers additional debug support. The developer has access to a software debugging system that traces debug information via, for instance, an on-chip UART of the microcontroller. TraceMon is very resource saving as the main operation is done on the PC and not on the KNX device itself.

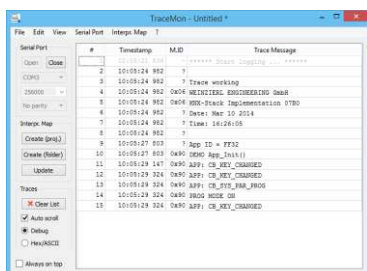

The level of the debug information (e.g. errors, warnings) can be set separately for every software module or can be turned off completely. Customer finds the same debugging procedures and settings in all of our KNX stacks. For the view of the debug output on PC, TraceMon is part of our solution package.


## Net'n Node: Bus Monitor

During the development of components for a bus system it is important to have a detailed view in what is going on in the devices and in the complete system. To analyze the behavior of a bus device or the interworking of the system, a protocol analyzer is required. The Software Net'n Node is our comprehensive tool for the KNX development.

## Net'n Node FEATURES

- Sending and receiving telegrams over KNX
- Analysis of a KNX system
- Analysis and control of single devices
- Reading out group objects
- Programming of bus devices
- Support of BAOS Protocol
- Access to KNX over serial, USB and IP Interfaces and Routers

# net'n node

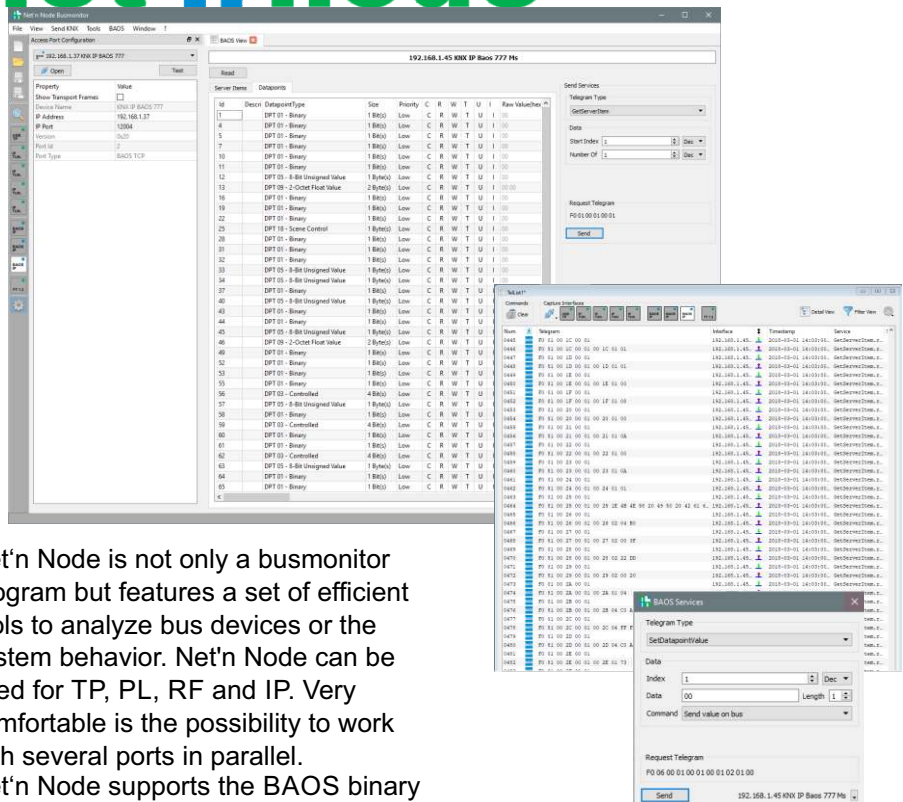

Net'n Node is not only a busmonitor program but features a set of efficient tools to analyze bus devices or the system behavior. Net'n Node can be used for TP, PL, RF and IP. Very comfortable is the possibility to work with several ports in parallel. Net'n Node supports the BAOS binary protocol via serial, USB or IP connection. A free version of Net'n Node is available at [www.weinzierl.de](http://www.weinzierl.de).



## Accredited Test Lab

Cross-manufacturer compatibility of various applications and products is one of the main columns of the KNX system. This is achieved by the advanced certification system of the KNX Association. All devices with a KNX logo must be tested by a test laboratory accredited by the KNX Association for compatibility.

## KNX Secure ready

Weinzierl operates its own officially accredited Test Lab for:

- System Software (KNX Stack)
- Applications (KNX interworking and functional test)
- KNX Security

The Test Lab completes our range of system solutions for KNX as we are able to test all system software and applications including those which support KNX IP Security and KNX Data Security.



- Advice before and during development (e.g. behaviour and description of KNX Data Points)
- Support for product registration
- Creation of test concept (ETS configurations)
- Creation of test setup
- Preparation of test sequences with the official test tool (EITT)
- Compliance tests according to the KNX specifications
- Creation of detailed test report


## Development Services


Apart from a great product idea system design is THE basis for successful development. Our system analysis includes both the integration of your product in the current KNX environment as well as architectural design of new KNX devices.

If you are interested in individual solutions or complete device development, we offer application development services including hardware design, programming and system integration. With broad experience in the development of bus components and systems, we are looking forward to finding solutions tailored specifically to your requirements. Of course, KNX product certification is also included in our service portfolio.

## Support

For development projects we offer support for our customers. In addition, we offer our consulting and training services also independently of product development.

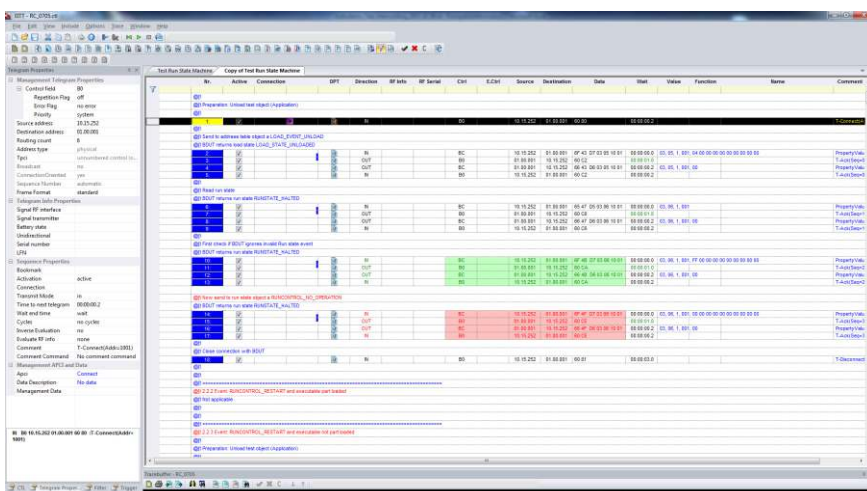

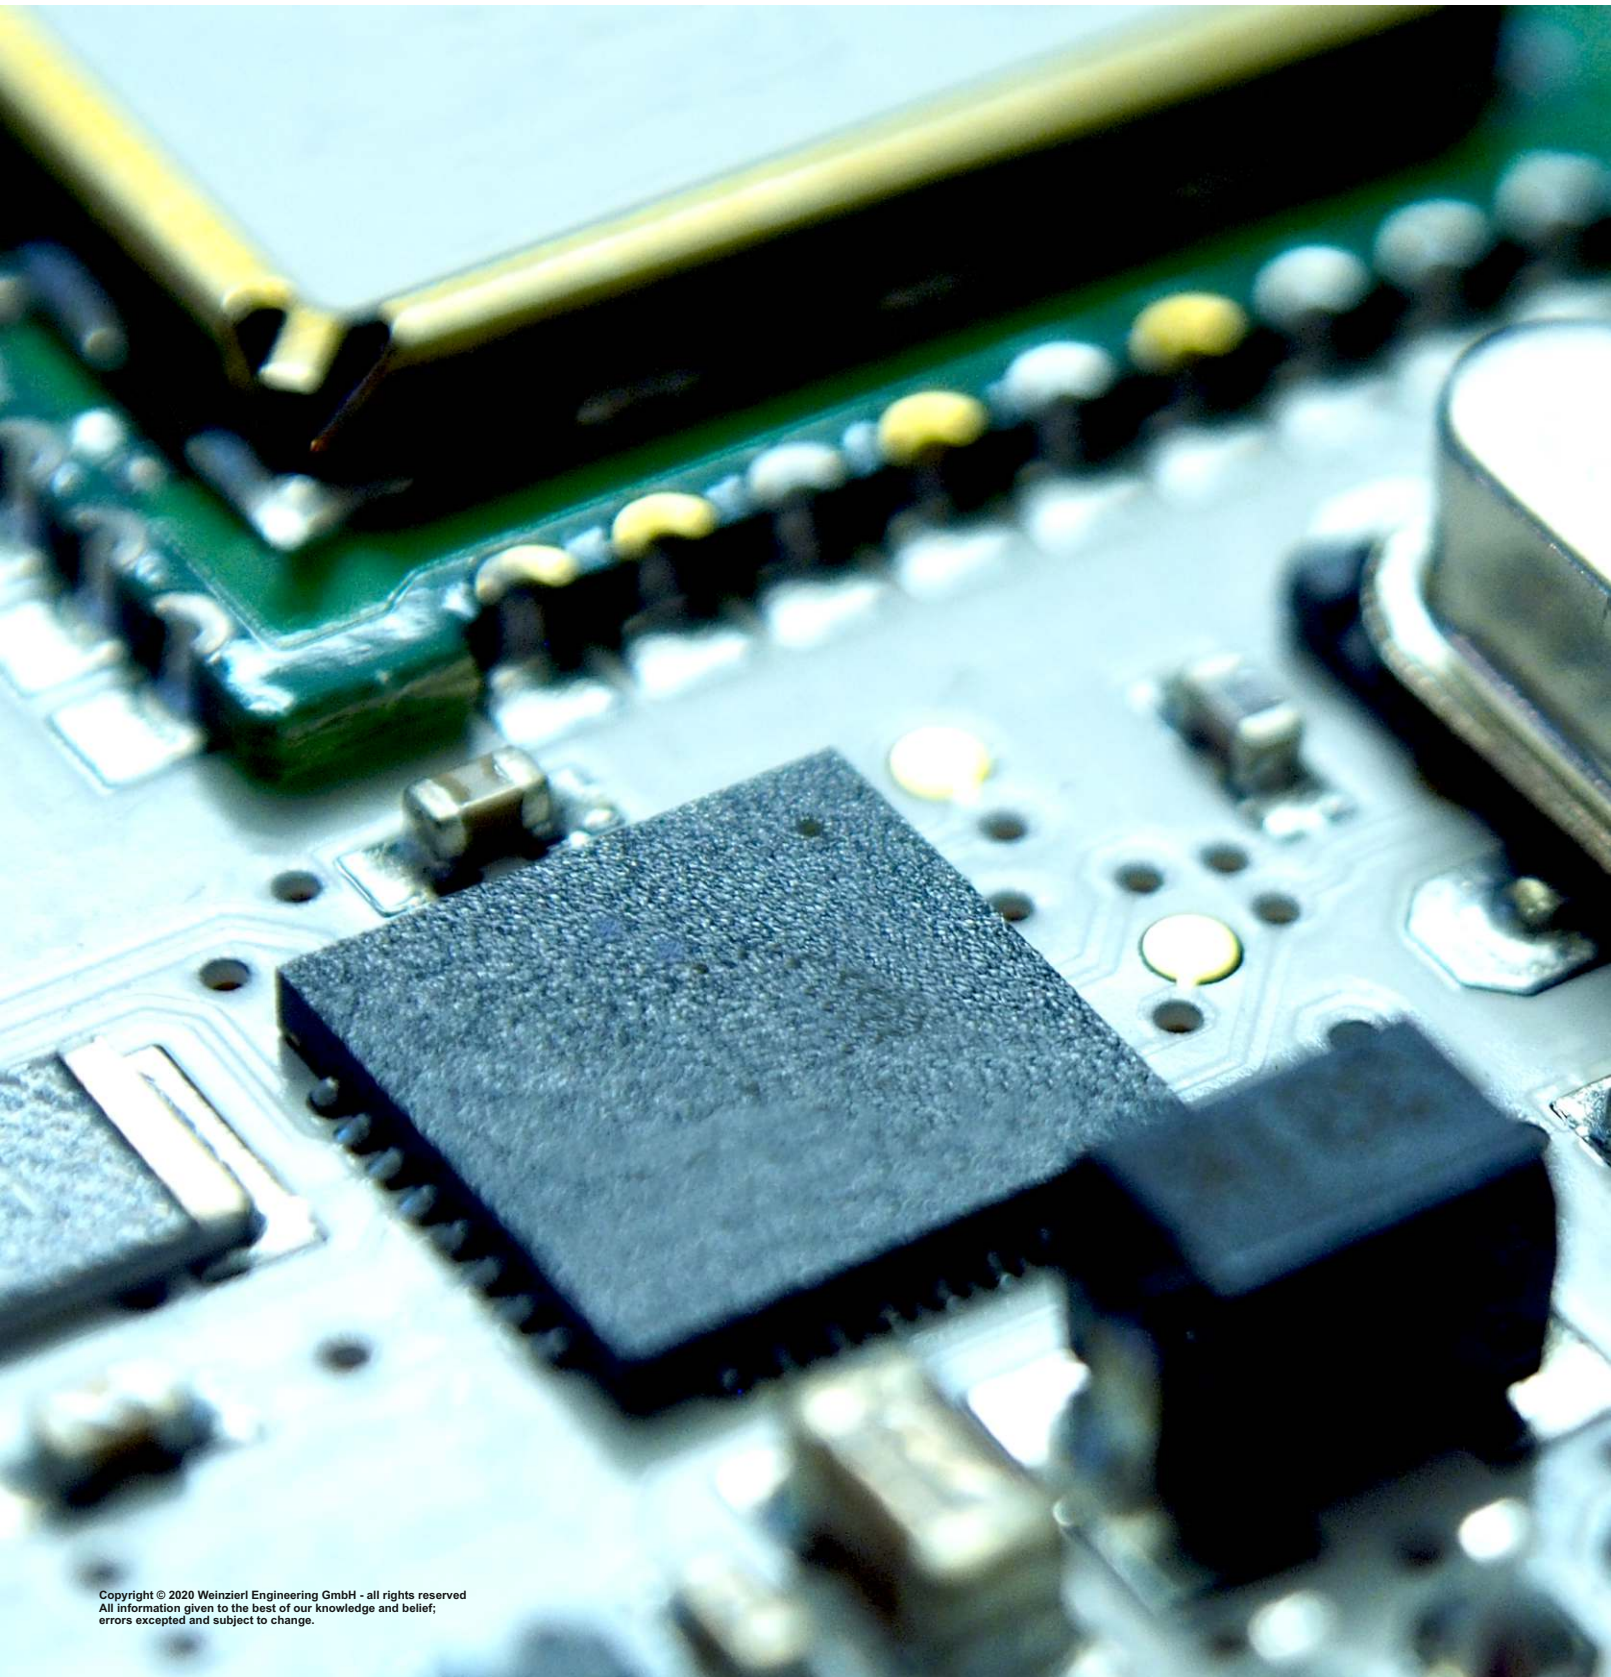

Copyright © 2020 Weinzierl Engineering GmbH - all rights reserved  
All information given to the best of our knowledge and belief;  
errors excepted and subject to change.

**Weinzierl Engineering GmbH**  
Achatz 3-4  
84508 Burgkirchen an der Alz  
Tel.: +49-8677-91636-0  
E-mail: [info@weinzierl.de](mailto:info@weinzierl.de)  
Web: [www.weinzierl.de](http://www.weinzierl.de)